

# BLUE STAR

## Power Systems

Diesel Product Line

208-480 Volt

VD600-04FT4MP

60 Hz / 1800 RPM

600 kWe / 570 kWe

Standby / Prime

### Ratings

	208V	240V	480V	Multi-Voltage
<b>Phase</b>	3	3	3	3
<b>PF</b>	0.8	0.8	0.8	0.8
<b>Hz</b>	60	60	60	60
<b>Generator Model</b>	573RSL6433	573RSL6433	572RSL6431	573RSL6433
<b>Connection</b>	12 LEAD WYE	12 LEAD DELTA	12 LEAD WYE	12 LEAD CONFIGURABLE
<b>Standby kWe</b>	600	600	600	600
<b>AMPS</b>	2084	1806	903	723
<b>Temp Rise</b>	130°C / 27°C	130°C / 27°C	130°C / 27°C	130°C / 27°C
<b>Prime kWe</b>	570	570	570	570
<b>AMPS</b>	1980	1716	858	686
<b>Temp Rise</b>	105°C / 40°C	105°C / 40°C	105°C / 40°C	105°C / 40°C

### Standard Equipment

#### Engine

- Radiator Cooled Unit Mounted (55°C)
- Radiator Duct Flange (OPU Only)
- Blower Fan & Fan Drive
- Starter & Alternator
- Oil Pump & Filter
- Oil Drain Extension w/Valve
- Governor - Electronic Isochronous
- 24V Battery System & Cables
- Air Cleaner (Dry Single Stage)
- SRC Catalyst / Silencer Mounted
- Flexible Fuel Connector
- EPA Certified Tier 4 Final / EU Stage 5 Certified

#### Generator

- Brushless Single Bearing
- Automatic Voltage Regulator
- ± 0.50% Voltage Regulation
- 4 Pole, Rotating Field
- 130°C Standby Temperature Rise
- 105°C Prime Temperature Rise
- 100% of Rated Load - One Step
- 5% Maximum Harmonic Content
- NEMA MG 1, IEEE and ANSI Standards Compliance for Temperature Rise

#### Additional

- Single Source Supplier
- NFPA 110 / CSA C282 Compliant
- Microprocessor Based Digital Control Panel Mounted in NEMA 12 Enclosure
- Base - Structural Steel
- Level 3 Sound Attenuated Enclosure
- Trailer with Integrated 550 Gallon Fuel Tank
- Main Line Circuit Breaker Mounted & Wired
- Battery Charger 24V 5 Amp
- Jacket Water Heater -20°F 5000W 240V w/Isolation Valves
- Vibration Isolation Mounts
- 2 Year / 2000 Hour Standby Warranty
- 1 Year / 1500 Hour Prime Warranty
- Standard Colors - White

## Application Data

### Engine

Manufacturer:	Volvo Penta	Displacement - Cu. In. (lit):	984 (16.12)
Model:	TWD1683GE	Bore - in. (cm) x Stroke - in. (cm):	5.67 (14.4) x 6.50 (16.5)
Type:	4-Cycle	Compression Ratio:	16.8:1
Aspiration:	Turbo Charged, H2O to Air CAC	Rated RPM:	1800
Cylinder Arrangement:	6 Cylinder Inline	Max HP Stby (kWm):	932 (695)

### Exhaust System

	Standby	Prime
Gas Temp. (Stack): °F (°C)	862 (461)	810 (432)
Gas Volume at Stack Temp: CFM (m³/min)	3,991 (113)	3,673 (104)
Maximum Allowable Exhaust Restriction (Post Catalyst): in. H <sub>2</sub> O (kPa)	40.0 (10.0)	40.0 (10.0)

### Cooling System

Ambient Capacity of Radiator: °F (°C)	131 (55.0)	131 (55.0)
Maximum Allowable Static Pressure on Rad. Exhaust: in. H <sub>2</sub> O (kPa)	0.50 (0.12)	0.50 (0.12)
Water Pump Flow Rate: GPM (lit/min)	122 (462)	122 (462)
Heat Rejection to Coolant: BTUM (kW)	12,397 (217)	12,170 (213)
Heat Rejection to CAC: BTUM (kW)	9,497 (166)	9,099 (159)
Heat Radiated to Ambient: BTUM (kW)	11,948 (209)	11,366 (199)

### Air Requirements

Aspirating: CFM (m³/min)	1,801 (51.0)	1,695 (48.0)
Air Flow Required for Rad. Cooled Unit: CFM (m³/min)	26,926 (762)	26,926 (762)
Air Flow Required for Heat Exchanger/Rem. Rad. CFM (m³/min)	Consult Factory For Remote Cooled Applications	

### Fuel Consumption

At 100% of Power Rating: gal/hr (lit/hr)	39.6 (150)	37.8 (143)
At 75% of Power Rating: gal/hr (lit/hr)	29.9 (113)	28.5 (108)
At 50% of Power Rating: gal/hr (lit/hr)	21.6 (81.6)	20.6 (77.8)
DEF Consumption (% of fuel consumption)	± 6.00%	± 6.00%

### Fluids Capacity


Total Oil System: gal (lit)	12.7 (48.0)	12.7 (48.0)
Engine Jacket Water Capacity: gal (lit)	6.60 (25.0)	6.60 (25.0)
System Coolant Capacity: gal (lit)	23.8 (90.1)	23.8 (90.1)
DEF Tank Capacity: gal (lit)	52.8 (200.0)	52.8 (200.0)

Deration Factors: Rated Power is available up to 4,921 Ft (1500m) at ambient temperatures to 122°F (50°C). Consult factory for site conditions above these parameters.

## DCP7310 Control Panel


### Standard Features

- Digital Metering
- Engine Parameters
- Generator Protection Functions
- Engine Protection
- CAN Bus (J1939) ECU Communications
- Windows-Based Software
- Multilingual Capability
- Remote Communications to DSE2548 Remote Annunciator
- 8 Programmable Contact Inputs
- 10 Contact Outputs
- RS485 Communicator Interface
- cULus Listed, CE Approved
- Event Recording
- IP 65 rating (with supplied gasket) offers increased resistance to water ingress
- NFPA 110 Level 1 Compatible

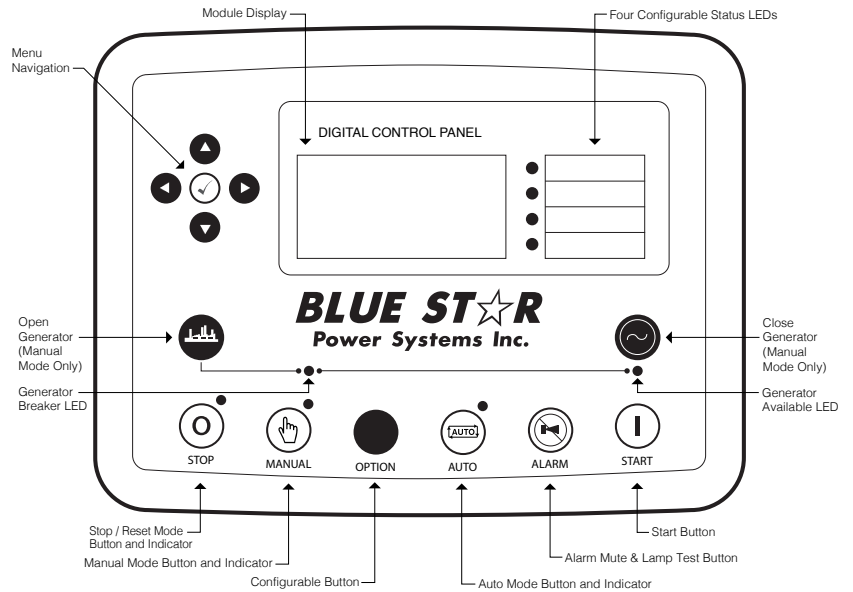

## Convenience Panel

- 2-50A 125/250VAC 3P4W Twist Lock Non-Nema CS6369
- 1-30A 125/250VAC 3P4W Twist Lock Nema L14-30R
- 2-20A 120VAC Duplex GFCI Nema 5-20R
- Thumb Screw Terminals for 2-Wire Remote Start
- 30A 240VAC Male Receptacle for Jacket Water Heater Shore Power Connection
- 15A 120VAC Male Receptacle for Battery Charger Shore Power Connection
- 22-400A Rated Female Cam Style Locking Receptacles for Load Connection

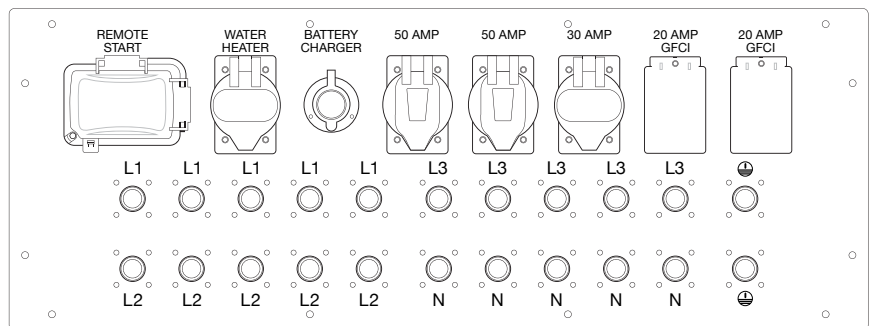


\* Drawing and configuration may vary from illustration. All drawings and dimensions subject to change without notice.

# Diesel Product Line

600 kWe / 570 kWe



## Dimensions

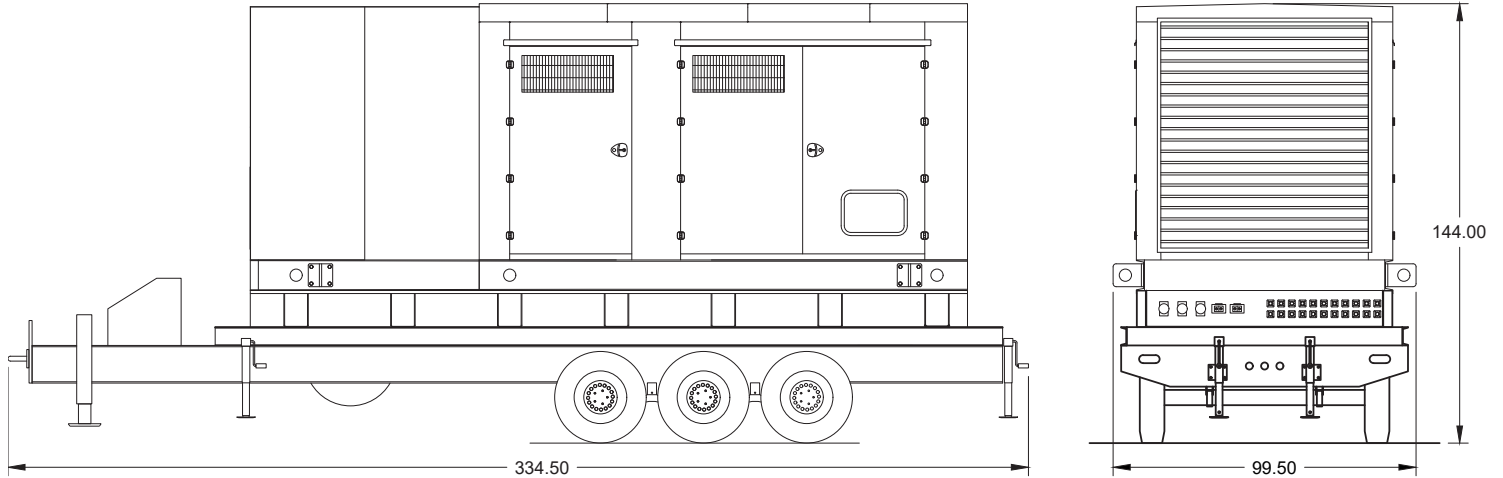

- Approximate Ship Weight: 25,000 lbs.
- Approximate Wet Weight: 29,000 lbs.
- Weights based on standard trailer package. Additional options may increase weight.
- Sound data measured at 23 feet (7 meters) in accordance with ISO 8528-10.

### Sound Data

No Load	Full Load
74 dBA	76 dBA

### Notes

- All specification sheet dimensions are represented in inches.
- All drawings based on standard 480 volt standby generator. Lengths may vary with other voltages. All drawings and dimensions subject to change without notice.
- All enclosures and fuel tanks are based on the standard standby unit configuration. Any deviation can change dimensions.
- Sound data is measured at 23 feet (7 meters) in accordance with ISO 8528-10.
- All materials and specifications subject to change without notice.

### Blue Star Power Systems

2250 Carlson Drive  
North Mankato, Minnesota 56003  
Phone + 1 507 345 1776  
bluestarps.com  
quote.bluestarps.com  
sales@bluestarps.com

**/ A DEUTZ COMPANY /**